



DATA SHEET

SEMICONDUCTOR

BAT54SW

Dual Series Schottky Barrier Diodes





SOT-323 (SC-70)

These Schottky barrier diodes are designed for high speed switching applications, circuit protection, and voltage clamping. Extremely low forward voltage reduces conduction loss. Miniature surface mount package is excellent for hand held and portable applications where space is limited.

- Extremely Fast Switching Speed
- Low Forward Voltage — 0.35 Volts (Typ) @ $I_F = 10 \text{ mA}$

We declare that the material of product compliance with RoHS requirements.

S- Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable.



DEVICE MARKING

BAT54SW= B8

MAXIMUM RATINGS ($T_J = 125^\circ\text{C}$ unless otherwise noted)


Rating	Symbol	Value	Unit
Reverse Voltage	V_R	30	Volts
Forward Power Dissipation @ $T_A = 25^\circ\text{C}$	P_F	200	mW
Derate above 25°C		1.6	mW/ $^\circ\text{C}$
Forward Current(DC)	I_F	200Max	mA
Junction Temperature	T_J	125Max	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-55 to +150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
Reverse Breakdown Voltage ($I_R = 10 \mu\text{A}$)	$V_{(BR)R}$	30	—	—	Volts
Total Capacitance ($V_R = 1.0 \text{ V}$, $f = 1.0 \text{ MHz}$)	C_T	—	—	10	pF
Reverse Leakage ($V_R = 25 \text{ V}$)	I_R	—	0.5	2.0	μA
Forward Voltage ($I_F = 0.1 \text{ mA}$)	V_F	—	0.22	0.24	Vdc
Forward Voltage ($I_F = 30 \text{ mA}$)	V_F	—	0.41	0.5	Vdc
Forward Voltage ($I_F = 100 \text{ mA}$)	V_F	—	0.52	1.0	Vdc
Reverse Recovery Time ($I_F = I_R = 10 \text{ mA}$, $I_{R(REC)} = 1.0 \text{ mA}$, Figure 1)	t_{rr}	—	—	5.0	ns
Forward Voltage ($I_F = 1.0 \text{ mA}$)	V_F	—	0.29	0.32	Vdc
Forward Voltage ($I_F = 10 \text{ mA}$)	V_F	—	0.35	0.40	Vdc
Forward Current (DC)	I_F	—	—	200	mA
Repetitive Peak Forward Current	I_{FRM}	—	—	300	mA
Non-Repetitive Peak Forward Current ($t < 1.0 \text{ s}$)	I_{FSM}	—	—	600	mA

ELECTRICAL CHARACTERISTICS

BAT54SW

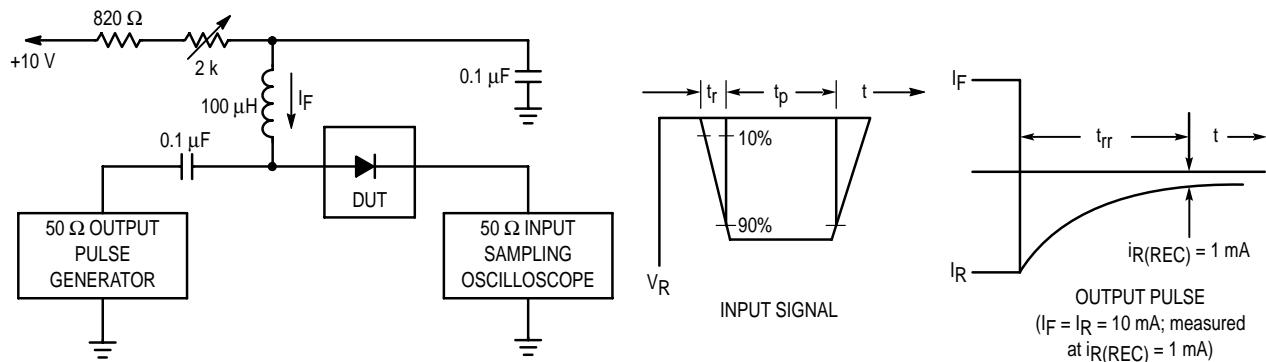

Notes: 1. A 2.0 kΩ variable resistor adjusted for a Forward Current (I_F) of 10 mA.
 2. Input pulse is adjusted so $|I_R(\text{peak})|$ is equal to 10 mA.
 3. $t_p \gg t_{rr}$

Figure 1. Recovery Time Equivalent Test Circuit

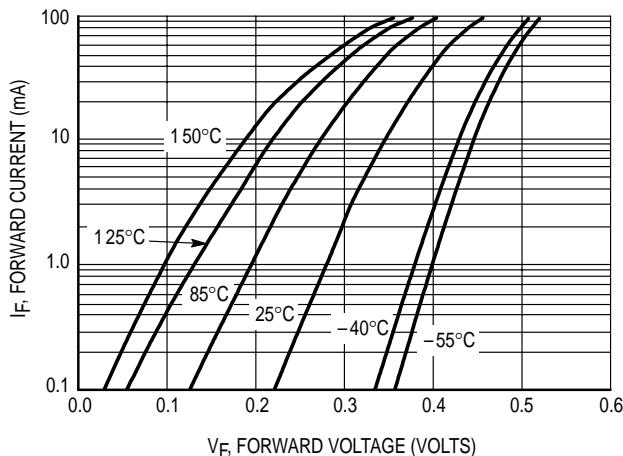


Figure 2. Forward Voltage

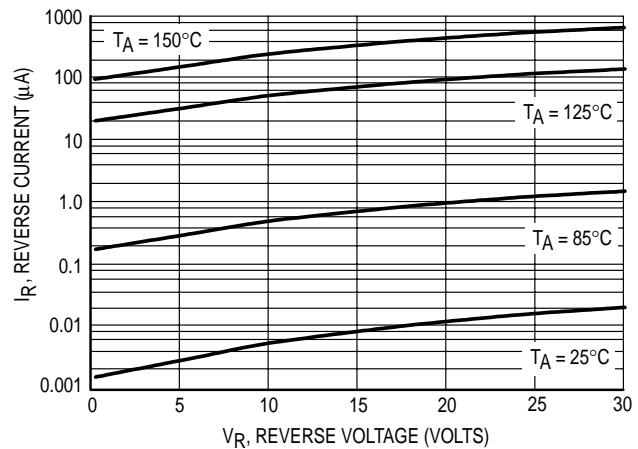


Figure 3. Leakage Current

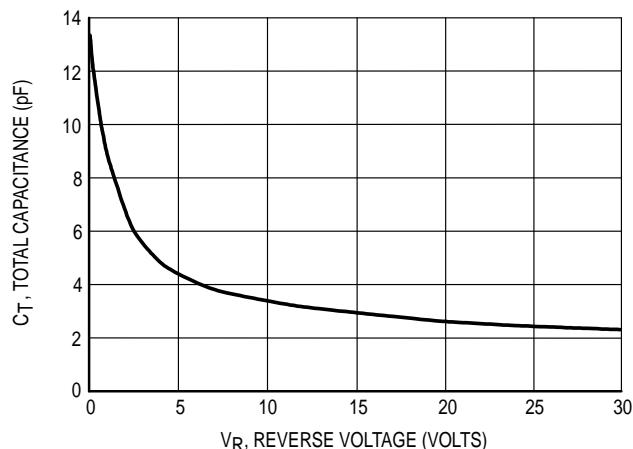


Figure 4. Total Capacitance


PACKAGE OUTLINE AND DIMENSIONS

BAT54SW

SC-70 / SOT-323

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

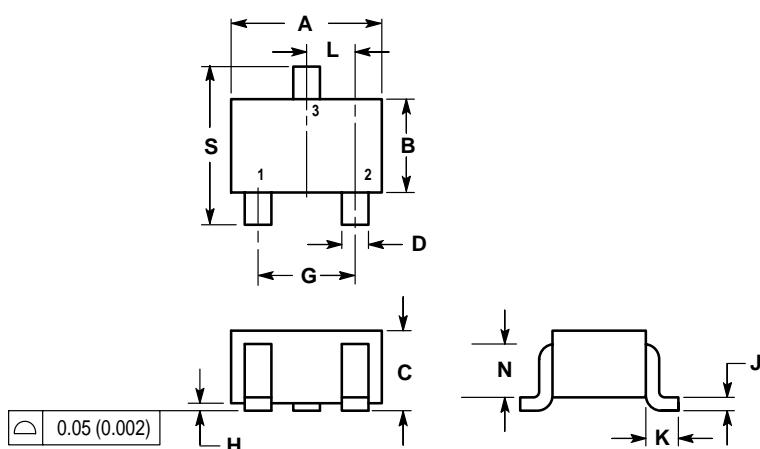

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.071	0.087	1.80	2.20
B	0.045	0.053	1.15	1.35
C	0.032	0.040	0.80	1.00
D	0.012	0.016	0.30	0.40
G	0.047	0.055	1.20	1.40
H	0.000	0.004	0.00	0.10
J	0.004	0.010	0.10	0.25
K	0.017	REF	0.425	REF
L	0.026	BSC	0.650	BSC
N	0.028	REF	0.700	REF
S	0.079	0.095	2.00	2.40

